



Integrated Outdoor LED Wall Lantern W/ Oil Rubbed Bronze Aluminum Die Cast & Water Glass Lens

Product Description

A step above simple outdoor lighting, the Euri Lighting Flame Bulb Fixture decorates, illuminates and protects. Note-worthy and inventive, the LED-integrated outdoor lantern is designed with dusk to dawn technology, motion sensor detection and an enclosed flame bulb programmed with over 300 LEDs. At sun set, the enclosed flame bulb turns on flicker motion, then when motion is detected, the fixture turns to full brightness. Aside from ensuring safety and security, the decorative lantern offers an aesthetic appeal with water glass, oil-rubbed bronze finish, and a swopping S-hook arm.





*Note: Design, features and specifications subject to change without notice. Some features may not be available on all models. For more information please visit: www.eurilighting.com or call 1-888-743-5766




Integrated LED Fixture

Specifications

| Input Power | Input Voltage | Lumen Output | Beam Angle | Center Beam | ССТ |
|-------------|---------------|--------------|------------|-------------|--------|
| 12.5 W | 120 V | 1200 lm | 110° | N/A | 3000 K |

| CRI | Luminous Efficacy | Power Factor | Input Current | Base/Cap | VANITY |
|-----|-------------------|--------------|---------------|----------|-------------|
| 80 | 96 lm/W | 0.7 | 0.1 A | E12 | 50,000 Hrs. |

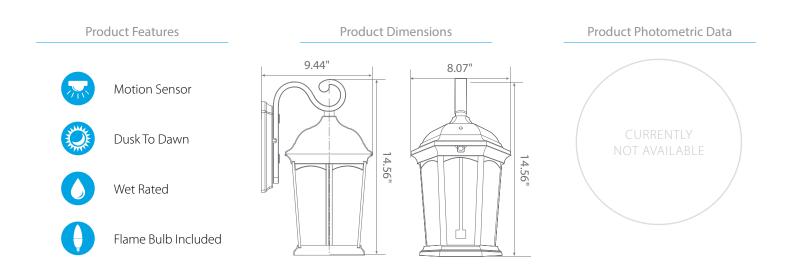

Euri Lighting | A Division of IRTRONIX Inc.





LED ECA9.5-2120fc



Bulb Class: Conical Angle

Product Description

LED ECA9.5-2120fc is a charming and romantic, this Euri Lighting flickering flame bulb accents and decorates every fixture, from an outdoor lantern to an indoor chandelier. With over 300 programmed LEDs, this long-lasting and energy-efficient flame bulb simulates a natural, flickering flame. Glowing in Candle Light (1800K) color temperature, this decorative flame bulb offers a clear glass lens, flame-shape body and white base – see Euri Lighting ECA9.5-2120fcb for black base option.

Enjoy features such as: animated flame, instant on, shatter resistance and mercury free.






*Note: Design, features and specifications subject to change without notice. Some features may not be available on all models. For more information please visit: www.eurilighting.com or call 1-888-743-5766

Specifications

| Input Power | Input Voltage | Lumen Output | CRI | Beam Angle | Base/Cap | ССТ | Lamp Lifespan |
|-------------|---------------|--------------|-----|------------|----------|--------|---------------|
| 1 W | 120V/60Hz | 80 lm | 80 | 120° | E12 | 1800 K | 15,000 hrs. |

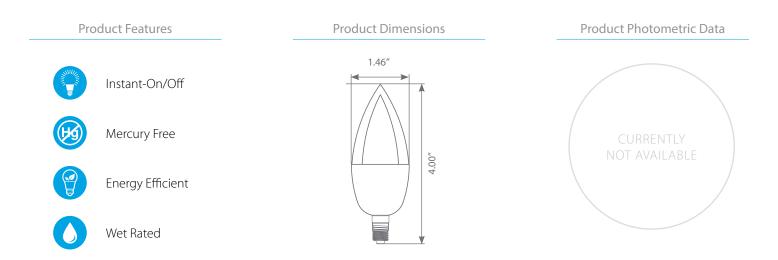

Euri Lighting | A Division of IRTRONIX Inc.

